

Meal Plating Cord Conveyor Straight

The cord belt meal plating up conveyor from Stoddart Manufacturing is the culmination of years of experience in manufacturing and supplying meal plating systems to Australian hospitals and other large Institutional customers. The system is the cleanest and the easiest to operate, requiring minimal maintenance.

It is available in a range of lengths to suit the number of persons working on the meal plating line. Each work station is equipped with a stop button and a 240 volt 15 amp single phase outlet for connection to mobile food serving carts and heated plate dispensers.

Models:**SPDH.MP.C.S.L**

Where:

SPDH = Standard Product Dish Handling

MP = Meal Plating

C = Cord Conveyor

L = Length (mm)


Std lengths 4000mm – suits 4 persons

5000mm – suits 6 persons

6000mm – suits 8 persons

W = Width (Std 550mm)

e.g.: SPDH.MP.C.S.L4000.W550

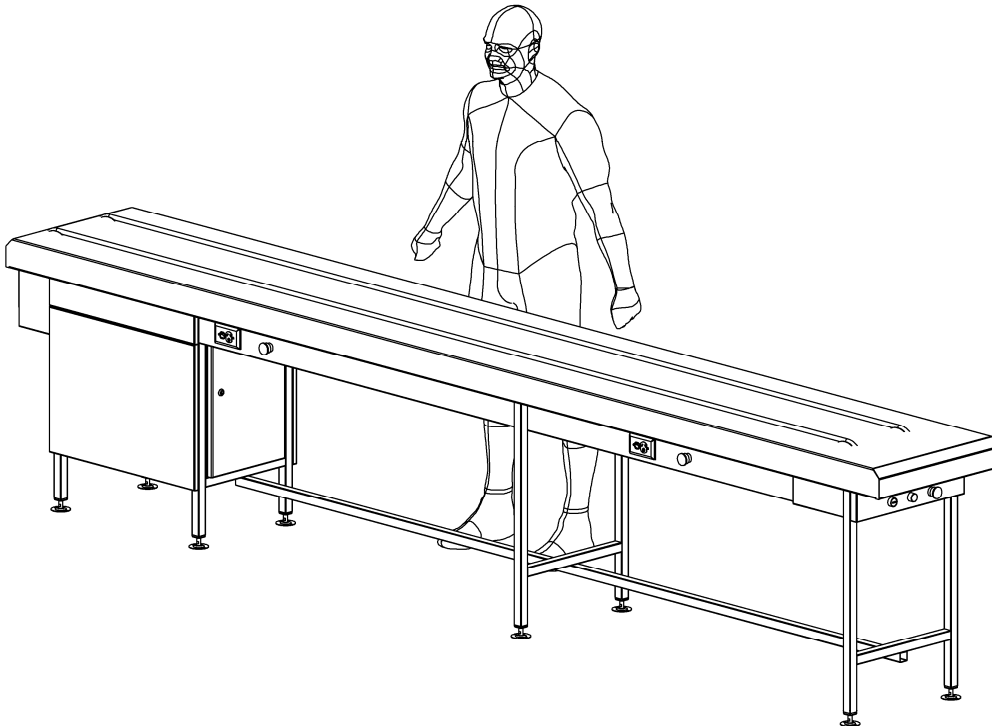**Features and Benefits:**

- Stainless Steel 304 No 4 construction throughout complete unit. 32x32 stainless steel legs and frame with adjustable feet.
- Stainless steel drive system bearings and cord drive rollers.
- Stainless steel cord drive belt adjustment system.
- Powerful electric motor and gearbox matched to suit conveyor length for years of trouble free service.
- Electronic variable speed and torque control for perfect speed matching to operator needs.
- Large industrial red mushroom head safety stop button and green 22mm diameter industrial start button at each operator location.
- 240 volt 15 amp GPO at each operator location to allow mobile food serving carts and heated plate storage carts to be powered in easy reach of each operator.
- Removable panels to the motor-gearbox drive enclosure.
- The 15mm diameter cord conveyor belt is joined using an extremely strong welded connection
- The large diameter cord creates more space below the meal trays, allowing the operators fingers to easily fit under the tray when lifting it off the conveyor.
- The unit is tested to Australian Std AS3760 and manufactured in accordance with AS/NZS 60635.1


Due to continuous product research and development, the information contained herein is subject to change without notification.

Stoddart Manufacturing

Tom Stoddart Pty Ltd. ABN 16 009690251
149 Jackson Road, Sunnybank Hills, Qld

Tel +61 7 33455011
Fax +61 7 33441000
Email: sales@stoddart.com.au
Web: www.stoddart.com.au

Printed date 17/11/2008
Revision Date 17/11/08



Outlet Conveyor–Gravity Roller Straight

Models:**SPDH.MP.C.S.L**

Where:

SPDH = Standard Product Dish Handling

MP = Meal Plating

C = Cord Conveyor

L = Length (mm)


Std lengths 4000mm – suits 4 persons

5000mm – suits 6 persons

6000mm – suits 8 persons

W = Width (Std 550mm)

e.g.: SPDH.MP.C.S.L4000.W550

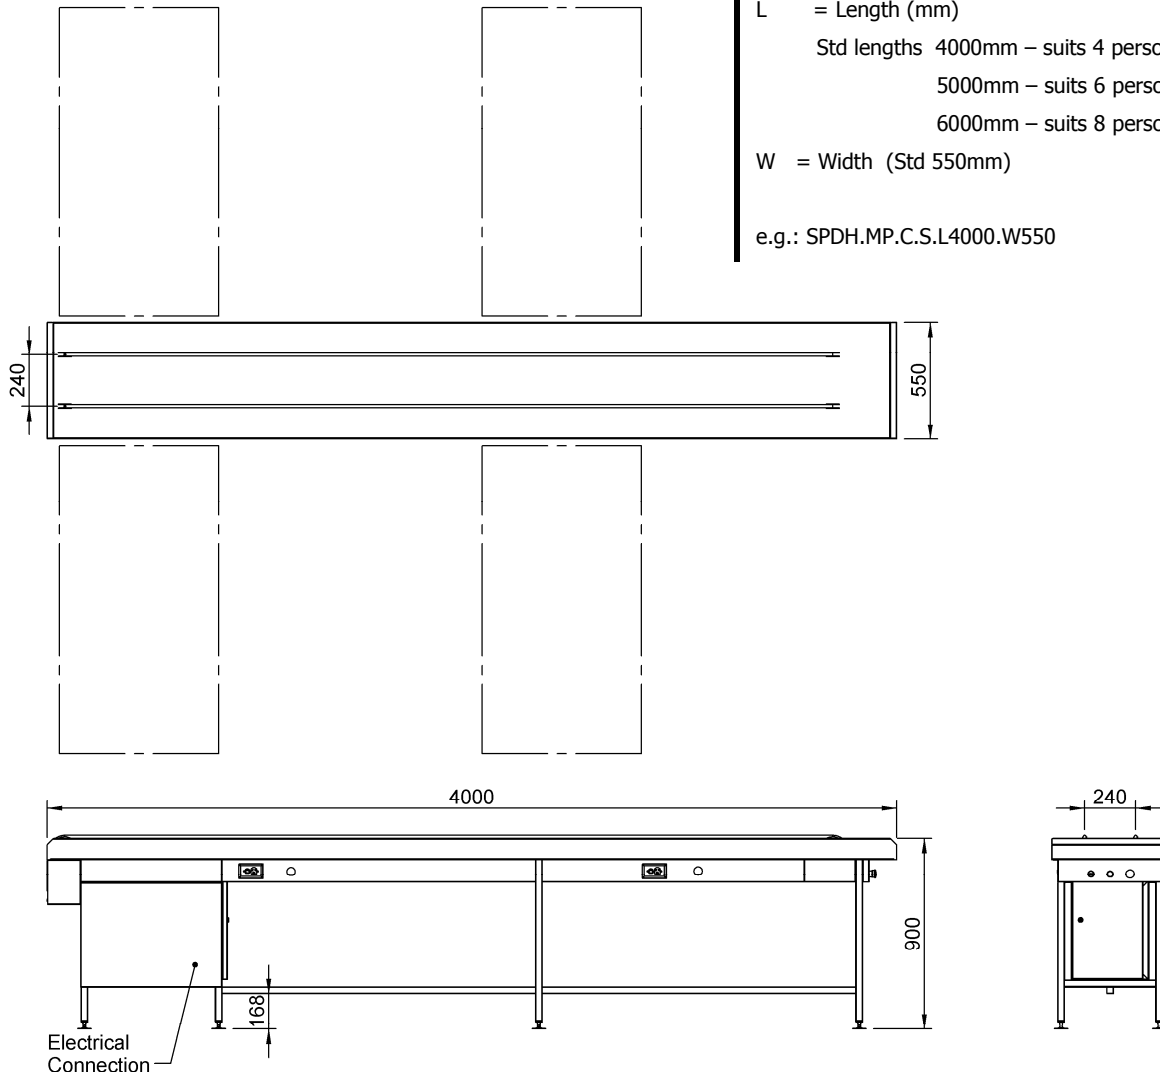

Equipment Data				
Model	Length (mm)	Total Electrical Load (Watts)	415 v 3A + N + E Amps/phase	Weight (kg)
SPDH.MP.C.S.L4000.W550	4000 mm	16800	23	
SPDH.MP.C.S.L5000.W550	5000 mm	24000	33	
SPDH.MP.C.S.L6000.W550	6000 mm	32000	44.5	

Note: All electrical controls are 240v.

Due to continuous product research and development, the information contained herein is subject to change without notification.